

International Journal of Advance Research in Computer Science and Management Studies

Research Paper

Available online at: www.ijarcsms.com

Classifying Mood Disordered Patients and Normal Subjects Using Various Machine Learning Techniques

Shamla Mantri¹Asst. Professor
Computer Engineering
MIT College of Engineering
Pune - India**Prajakta Chavan²**Computer Engineering
MIT College of Engineering
Pune - India**Priyanka Kadam³**Computer Engineering
MIT College of Engineering
Pune - India**Dipti Patil⁴**Asst. Professor
Computer Engineering
MIT College of Engineering
Pune - India**V. M. Wadhai⁵**Professor
Computer Engineering
MIT College of Engineering
Pune - India

Abstract: *Mood disorders strikes millions each year, often with debilitating consequences. This psychological disorder is so common that it is sometimes referred to as the "common cold" of mental health, with nearly 10% of the population suffering from a depressive disorder at any given time. A major mood disorder significantly affects a person's family and personal relationships, work or school life, sleeping and eating habits, and general health.*

The use of Electroencephalogram (EEG) signals in the field of Brain Computer Interface (BCI) has obtained a lot of interest with diverse applications ranging from medicine to entertainment. In this paper, we are going to study nonlinear analysis of EEG signal for discriminating mood disordered patients and normal controls. Power of four EEG bands and four nonlinear features including detrended fluctuation analysis (DFA), Higuchi fractal, correlation dimensions and Lyapunov exponent is considered. For classification of the two groups, k-nearest neighbor (KNN), linear discriminate analysis (LDA) and logistic regression (LR) as the classifiers are used. Machine learning techniques such as detrended fluctuation analysis (DFA), Higuchi fractal, correlation dimensions and Lyapunov exponent are mainly considered to distinguish between the normal subject and the normal one. Machine learning techniques are easy to implement and it gives best accuracy. It will be a complementary tool for psychiatrists to operate on the mood disordered patients.

Keywords: *Mood disorder, EEG, Detrended fluctuation analysis, Higuchi fractal, Correlation dimensions, Lyapunov exponent.*

I. INTRODUCTION

Non linear methods required number of data to research, but in linear methods requirement of data is less. Non linear methods are very sensitive to noise, but in linear methods are robust to noise. In the case of EEG, non linear methods are applied on linear data but not opposite. Non linear methods are simple to implement. Fractal dimension is used to characterize the short phenomena like eye blinking. We use non linear signal because biomedical signal are non stationary and linear methods are only used for stationary signal [1]. The medical side they use linear methods like FFT [1]. Chaotic transition represent the behavior of system in short period of time, which are very small change. Recent research suggests that stressful experiences lead to panic attack.

There are little difference between panic attack and phobia. Stressful experiences later leads to panic disorder and stressful memories lead to phobias. The stress disturbs the normal activities. Stressful memories may leads to rapid changes of mental

state [2]. Ca^{++} and Cl^{-} ions that are pumped through channels in neuron membranes in the direction governed by membrane potential [2], only large populations of active neurons can generate electrical activity recordable on the head surface. Between electrode and neuronal layers current penetrates through skin, skull and several other layers. Weak electrical signals detected by the scalp electrodes are massively amplified, and then displayed on paper or stored to computer memory [3]. Due to capability to reflect both the normal and abnormal electrical activity of the brain, EEG has been found to be a very powerful tool in the field of neurology and clinical neurophysiology. The human brain electric activity starts around the 17-23 week of prenatal development.

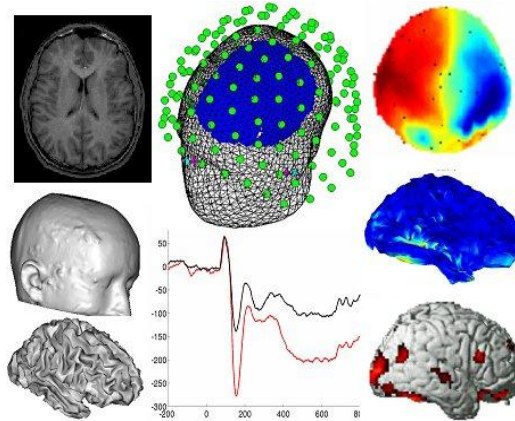


Fig.1-EEG Signals

II. MACHINE LEARNING TECHNIQUES

A. Detrended Fluctuation Analysis

Detrended Fluctuation Analysis (DFA) is a method for determining the statistical self-affinity of a signal. It is useful for analyzing time series that appear to be long-memory processes (diverging correlation time, e.g. power-law decaying autocorrelation function) or $1/f$ noise. The obtained exponent is similar to the Hurst exponent, except that DFA may also be applied to signals whose underlying statistics (such as mean and variance) or dynamics are non-stationary(changing with time)[23].It is related to measures based upon spectral techniques such as autocorrelation and Fourier transform.

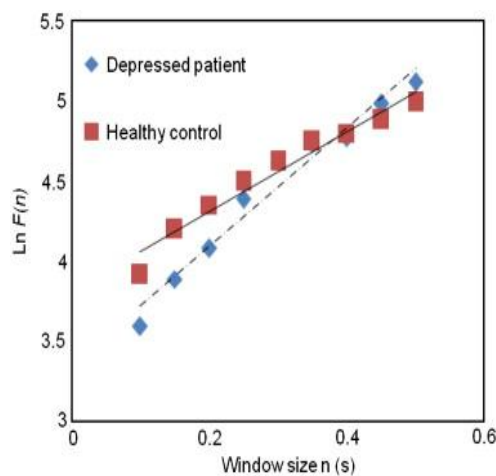


Fig. 2- Detrended fluctuation analysis (DFA) quantifies correlations in broad band EEG signals.

1. Working

In the DFA computation of a time series, $x(t)$ of finite length N , is integrated to generate a new time series $y(k)$ shown in.

$$y(k) = \sum_{i=1}^k [x(i) - \bar{x}]$$

where \bar{x} is the average of x , is given by.

Next, the integrated time series, $y(k)$ is divided into boxes of equal length and a least squares line is fit to the data of each box, represents by $y_n(k)$. Then, the time series $y(k)$ is detrended by subtracting the local linear fit $y_n(k)$ for each segment. The detrended fluctuation is given after removing the trend in the root-mean-square fluctuation

$$F(n) = \sqrt{\frac{1}{N} \sum_{k=1}^N [y(k) - y_n(k)]^2}$$

This computation is repeated for different box sizes (time scale) to characterize the relation between $F(n)$ and the box size n . A linear relation between logarithm of $F(n)$ and size of the box, indicates presence of power-law scaling: $F(n) \sim n^{\alpha}$. The scaling exponent, can be calculated as the slope of $\log F(n)$ versus $\log n$. This parameter represents the correlation properties of the time series.

2. Results of Classification based on nonlinear features

Result of nonlinear features, DFA, higuchi, correlation dimension and large lyapunov exponent are given for three classifiers. It can be seen that correlation dimension has been achieved the highest accuracy, 83.3%, when is used as the input of LR classifier among all features. At last, about 9 features are selected by GA in each classifier when 19 features are used as input. Fig. 2 indicates bar chart of these results. The DFA and higuchi[24] have approximately the same accuracy in classifying two groups in three classifiers and accuracy has the lowest value when lyapunov exponent is used as the input of classifiers.

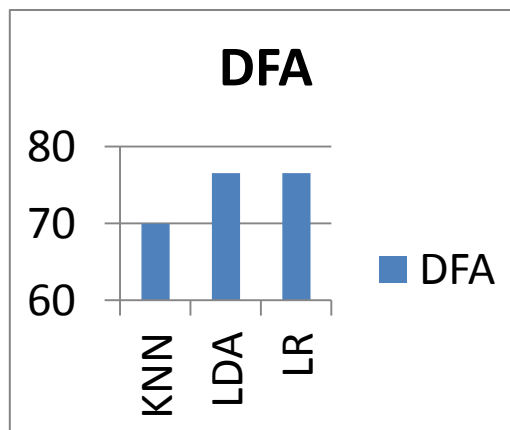


Fig. 3- Comparison of classifiers accuracy for each nonlinear feature.

B. Higuchi Algorithm

Higuchi proposed in 1988 an efficient algorithm for measuring the FD of discrete time sequences. Higuchi's algorithm calculates the FD directly from time series. As the reconstruction of the attractor phase space is not necessary, this algorithm is simpler and faster than D2 and other classical measures derived from chaos theory. FD can be used to quantify the complexity and self-similarity of a signal [9]. A brain computer interface BCI enables direct communication between a brain and a computer translating brain activity into computer commands using pre-processing, feature extraction, and classification operations. Feature extraction is crucial, as it has a substantial effect on the classification accuracy and speed. While fractal dimension has been successfully used in various domains [11]. The fractal dimension of a waveform represents a powerful tool for transient

detection. In particular, in analysis of electroencephalograms and electrocardiograms, this feature has been used to identify and distinguish specific states of physiologic function. A variety of algorithms are available for the computation of fractal dimension [12].

Calculating the FD of waveforms is useful for transient detection, with the additional advantage of fast computation. It consists of estimating the dimension of a time-varying signal (waveform) directly in the time domain, which allows significant savings in program run-time [13].

$$X_m^k = \{x[m], x[m + k], \dots, x[m + \lfloor \frac{N - m}{k} \rfloor]\}$$

The length of each k time series can be defined as:

$$L_m(k) = \frac{1}{k} \frac{\sum_{i=1}^{\lfloor (N-m/k) \rfloor} |x(m + ik) - x(m + (i - 1)k)|}{\lfloor (N - m/k) \rfloor}$$

An average length is computed for each time series having the same delay k, as the mean of k length $L_n(k)$ for $m = 1, 2, \dots, k$. The procedure is repeated for all k ranging from k_{min} to k_{max} . Yielding a sum of average length $L(k)$ for each k as indicated in

$$L(k) = \sum_{m=1}^k L_m(k)$$

The slope of least square linear fit in the curve of $\ln(L(k))$ versus $\ln(1/k)$ is estimated as fractal dimension[14].

1. Results of Classification based on Nonlinear Features:

Three classification techniques are used in experiments. There are other classification techniques such as SVM with nonlinear kernel and Naive Bayes using different types of features. However, our results with LDA, LR and KNN are superior to those obtained with other methods.

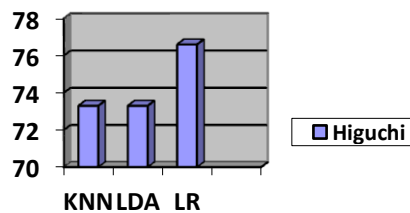


Fig.4-Classification of Higuchi algorithm w.r.t. classifiers

The highest accuracy was by combination of nonlinear features and LR classifier. LDA and LR classifier have better accuracy in all features in compare to KNN classifier. Accuracy of three classifiers is higher for all nonlinear features as the input in compare to power bands features. In this study, it is shown that the accuracy of all classifiers is significantly increased when nonlinear features are used as the input of classifiers. This result shows LR classifier can achieve the accuracy of 90% when all nonlinear features are applied to this classifier [18].

C. Lyapunov Exponent:

The aim of this study is to classify stressful patients and control subjects based on features .improving the accuracy of classification. It is the one of the feature extraction algorithm .Two groups of features are studied in this study [19]. Power of four EEG bands: delta, theta, alpha and beta as frequency and linear features and DFA, Higuchi, correlation dimension and maximum Lyapunov exponent are four nonlinear features that are used. For evaluation these features, LDA (linear discriminant analysis), LR (logistic regression) and KNN (k nearest neighbors) classifier are adopted used.

The Lyapunov exponent is most useful to measure the chaotic system .Lyapunov exponent is a useful nonlinear dynamic measure that quantifies the exponential divergence of initially nearby trajectories. Also, LE can characterize instability or predictability of a system. Lyapunov exponent is an important approach to the analysis of dimensionality [20].It is the sensitive dependence on the initial condition .It is average rate divergence of two neighboring (points) trajectories. To discriminate between chaotic dynamics & periodic signal LE is used. The trajectories follows the some pattern. The characterize average rate of divergence of this neighboring points.

1. Working:

In most applications, largest Lyapunov exponent (LLE) is computed instead of all exponents. The positive LLE

$$d_j(i) = d_j(0)e^{-i\Delta t}$$

Where $d_j(i)$ is the mean Euclidian distance between two neighbor trajectories in phase space at time t_i and $d_j(0)$ is Euclidian distance between the j th pair of initially nearest neighbors after i time step. Taking the algorithm of both sides [21].

We obtain:

$$\ln d_{j(i)} = -\lambda_j(i\Delta t) + \ln d_j(0)$$

The maximum Lyapunov exponent is calculated by the slop of linear fit to the average log divergence curve defined by,

$$\lambda_j(i) = \frac{1}{\Delta t} (\ln d_j(t))$$

is average over all value of j

The first positive Lyapunov exponent is one of the methods of checking whether a time series is chaotic or not. The divergence means that systems whose initial differences are very small will soon behave quite differently, and this marks the predictive ability of the time series is lost [22].

Negative LE implies that orbit approach a common fixed point. A zero exponent implies that orbit maintains their relative position .They is on stable attractor. Positive LE implies that orbits are a chaotic attractor.

$$\lambda_1(y_i) = [1/(t_n - t_0)] \sum_{k=1}^n \log_2 L'(t_k)/L(t_{k-1})$$

Where n are the propagation steps.

The algorithm proposed by Wolf et al. is used to find Largest LE (LLE) from EEG data. For given the time series $x(t)$ for m dimensional phase space with delay coordinate t that is a point on the attractor is given by:

$$\{x(t), x(t + t), \dots, x(t + (m - 1)t)\}$$

We locate nearest neighbor to initial point, and denote the distance between these two points as $L(t_0)$. The mean exponential rate of divergence of two initially close orbits is characterized by [7]:

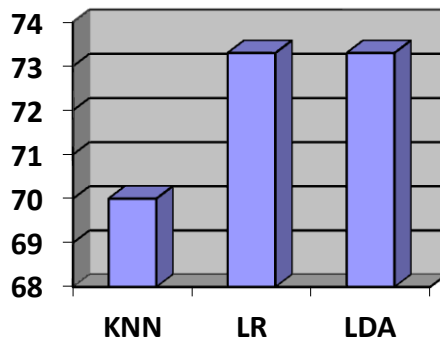


Fig. 5- Result of classifier for lyapunov exponent.

D. Correction Dimension:

Correlation dimension (D2) is one of the widely used measures of a chaotic. Dimension graph can give much information and detailed description about system. Dimensional graph determined by experimental data. It is very useful to understanding the system. It also used to approximate the dimension of these types of graphs.

It is computed from time series (cr) represent to find the closer point between r values. A fractal dimension id any dimension measurement that also allows the non integer values. To measure dimension of set is to measure the kalmogorov capacity (box counting).Set is covered with small cells (set of square) [19].

I. Working:

There are many different notions of fractal dimension measurements like correlation dimension because it permits the non integer values. The correlation dimension denoted by ν . Assume a time series with N data points, $x = [x(1),x(2), . . . , x(N)]$, by choosing time delay τ and embedding dimension m , a new m dimension vectors can be reconstructed as

$$X(i) = [x(i), x(i + \tau), \dots , x(i + (m - 1)\tau)] \quad i = 1,2, \dots , N - (m - 1)\tau$$

An appropriate time delay τ and embedding dimension m is important for the success of reconstructing the attractor with finite data. [25]

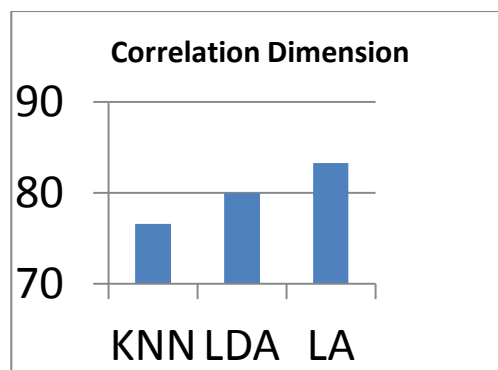


Fig.6 - Bar Chart of Classifier Result

Linear discriminate analysis, also known as Fisher’s linear discriminate. It is a statistical method which is commonly used for data classification. LDA finds linear combination of features to classify two or more classes.

In KNN algorithm, k nearest training sample for a test sample is found .We can observe that LR has more accuracy level other than the LDA and KNN.

III. CONCLUSION

In this paper we studied different machine learning techniques such that detrended fluctuation analysis (DFA), Higuchi fractal, correlation dimensions and Lyapunov exponent. The appropriate evaluation of patients with epileptic disorders is often impossible without an EEG. Digital EEG is the paperless recording of an EEG using computer-based instrumentation. The data are stored on electronic media, such as magnetic drives or optical disks and displayed on a monitor. EEG signal can be a useful tool in identifying mental disorders. Three well-known classifiers, KNN, LDA and LR were employed for classification. LR classifiers performed better than two other classifiers: LDA and KNN. We studied the working of four different algorithms for classification of mood disordered patients and normal subjects. We conclude that correlation dimension algorithm is most efficient algorithm among all these algorithms.

References

1. Behshad hosseinifarda, Mohammad hassan moradia, Reza rostamib, "classifying depression patients and normal subjects using machine learning techniques and nonlinear features from eeg signa", Tehran university, iran 2012
2. Ericka Janet Rechy-Ramirez and Huosheng hu, "stages for developing control systems using emg and eeg signals: a survey", school of computer science and electronic engineering university of essex, united kingdom, june 9, 2011
3. Alessandro vigano, Neri accornero, Alfredo colosimo, "migraine and epilepsy: looking for a common pathophysiological model"
4. João pedro de matos rodrigues, " monitoring electrocortical activity during eeg biofeedback" October 2009
5. Abdul-bary raouf suleiman, Toka abdul-hameed fatehi, "features extraction techniques of eegsignal for bci applications", computer and information engineering department college of electronics engineering, University of mosul , Iraq
6. Chu kiong loo, Andrews samraj, and Gin chong lee, "evaluation of methods for estimate fractal dimension in motor imagery-based brain computer interface", 19 october 2011
7. Rosana esteller, "a comparison of waveform fractal dimension algorithms"
8. Carlos gómez, Angela mediavilla , Roberto hornero , Daniel abásolo , Alberto fernández "use of the higuchi's fractal dimension for the analysis of meg recordings from alzheimer's disease patients" ,25 june 2008
9. G e polychronaki, P y ktonas, S gatzonis, Siatouni, P asvestas, Tsekou, Sakas, and Nikita "comparison of fractal dimension estimation algorithms for epileptic seizure onset detection", 23 june 2010
10. Włodzimierz klonowski, "application of new non-linear dynamics methods in biosignal analysis"
11. Włodzimierz klonowski, "fractal dimension of cerebral cortical surface in schizophrenia and obsessive-compulsive disorder", 25 april 2005
12. Qiang wang, Olga sourina , Minh khoa nguyen, "fractal dimension based neurofeedback in serious games"
13. Yisi liu, olga sourina, and Minh khoa nguyen, "real-time eeg-based emotion recognition and its applications"
14. Wu ting a, Yan guo-zheng , Yang bang-hua , Sun hong, "eeg feature extraction based on wavelet packet decomposition for brain computer interface", 8 august 2007
15. M. teplan, "fundamentals of eeg measurement", Institute of measurement science, Slovak academy of sciences
16. Liang wu and Predrag neskovic, "feature extraction for eeg classification: representing electrode outputs as a markov stochastic process", Department of physics and institute for brain and neural systems brown university
17. Qiang wang, Olga sourina, and Minh khoa nguyen, "eeg-based "serious" games design for medical applications", Singapore
18. Carlos gómez, Angela mediavill, Roberto hornero, Daniel abásolo, Alberto fernández, use of the higuchi's fractal dimension for the analysis of meg recordings from alzheimer's disease patients"
19. S. A. Hosseini "Qualitative and Quantitative Evaluation of EEG Signals in Epileptic Seizure Recognition(2013).
20. Bartosz Swiderski, Stanislaw Osowski, Andrzej Rysz, " Lyapunov Exponent of EEG Signal for Epileptic Seizure Characterization.

21. The Santa Fe Institute, 1120 Canyon Rd., Santa Fe, NM, 87501 And Center for Nonlinear Studies, Los Alamos National Laboratory, Los Alamos, NM," fractal dimensions, lyapunov exponents, and predict ability of human eeg signals"
22. İ.GÜLER, E.D.ÜBEYLİ," automated diagnostic system developed for eeg signals Using lyapunov Exponents(2005).
23. C. Peng, J. Hausdorff, A. Goldberger, Fractal Mechanisms in Neural Control: Human Heartbeat and Gait Dynamics in Health and Disease, Cambridge University Press, Cambridge, 2000.
24. R. Esteller, G. Vachtsevanos, J. Echaz, B. Litt, A comparison of waveform fractal dimension algorithms, IEEE Transactions on Circuits and Systems I: Fundamental Theory and Applications 48 (2) (2001) 177–183
25. K.luggar,d.flotzinger,a. Scholgl."feature extraction for on-line eeg classification using principle components and linear discriminates",1998.
26. M. Teplan , measurement science review, "fundamentals of eeg measurement ", volume 2, section 2, 2002

AUTHOR(S) PROFILE



Shamla T. Mantri, has received B.E. degree in Electronics Engineering from Marathwada University in 1993 and M.E. degree in Electronics (VLSI and Embedded System) from Pune University, India in 2011. She is pursuing her PhD in Electronics from Nagpur University in G.H. Raison College of Engineering, Nagpur P.G. department of Electronics. She is currently working as Assistant Professor in MITCOE, Pune. She has published numbers of national and international papers. Her Research interests include Signal Processing and Image processing.



Miss. Prajakta Chavan, Pursuing Bachelor of Engineering from MIT college of Engineering in CE. Received Diploma of Computer Engineering in 2011.Her field of interest is Signal Processing. She is currently working on EEG signal Feature Extraction.



Miss. Priyanka S. Kadam, Pursuing Bachelor of Engineering from MIT college of Engineering in CE. Received Diploma of Computer Engineering in 2011. She is Currently working on how to analyze the stress using EEG signal with preprocessing technique.



Dipti D. Patil, has received B.E. degree in Computer Engineering from Mumbai University in 2002 and M.E. degree in Computer Engineering from Mumbai University, India in 2008. She is pursuing her PhD from Sant Gadgebaba Amravati University in P.G. Department of Computer Science and Engineering, SGBAU, Amravati. She is currently working as Assistant Professor in MITCOE, Pune. She has filed patents in data mining area and published numbers of international papers. Her Research interests include machine learning, Medical Signal Processing and Wireless Body Area Networks.



Dr. Vijay M. Wadhai, received his B.E. from Nagpur University in 1986, M.E. from Gulbarga University in 1995 and Ph.D. degree from Amravati University in 2007. He has experience of 26 years which includes both academic (19 years) and research (7 years). He has been working as the Principal of MAEER's MITCOE, Pune since 2010. He had worked as Dean of Research, MITSOT, MAE, Pune (from 2009 to 2010) and handled the post of Director - Research and Development, Intelligent Radio Frequency (IRF) Group, Pune. He is currently guiding various numbers of students for their PhD work in both Computers and Electronics & Telecommunication area. His research interest includes Deductive Databases, Knowledge Discovery and Data Mining, Data Security, Natural Language processing, Cognitive Radio and Wireless Communication, Spectrum Management, Wireless Sensor Network, ASIC Design - VLSI, Advance Network Design. He is a member of LMISTE, MIETE, MIEEE, MIES and GISFI (Member Convergence Group), India. He has filed numbers of patents in his research areas and also published quality International journal papers.